

Bulk Fiber Optic Cables|SC to SC Breakout Patch Cable 32 48 Cores Corning G657A1 OFNR

SC-SC Cable


SC-SC Cable Fiber Optic Patch cord means that the terminations are connect at both ends of the optical cable to realize the optical path active connection. Optical Fiber Patch cord is similar to coaxial cable except that there is no mesh shield. The light-transmitting glass core is in the central. The fiber core has a diameter of 50/125 μ m to 65/125 μ m for multi mode fiber patch cords, which is roughly equivalent to the thickness of a human hair. The diameter for single mode fiber core is 8 μ m to 10 μ m. The fiber core is wrapped by a glass which is having a lower index of refraction than the core to maintain the fiber within the core



Connector Technical Parameter

Model		SM
Connector A : SC		
Insertion Loss	Standard	≤0.3dB
Return Loss		UPC≥50dB
Durability(500 Matings)		≤0.2dB
Test Wavelength		1310nm&1550nm
Connector B : SC		
Insertion Loss	Standard	≤0.3dB
Return Loss		UPC≥50dB
Durability(500 Matings)		≤0.2dB
Test Wavelength		1310nm&1550nm

Cable Structure Diagram

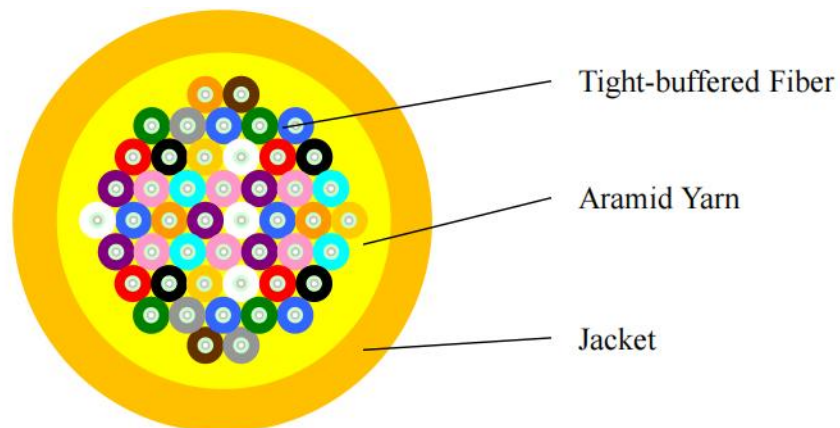

Cable Dimensions and Constructions

Items		Descriptions
Tight-buffered Fiber	Dimension	850±50µm
	Fiber Count	32
	Material	PVC
	Color	Blue、 Orange、 Green、 Brown、 Gray、 White
Strength Member	Material	Aramid Yarn
Sheath	Material	LSZH
	Color	Orange
	Diameter	9.5mm

Mechanical and Environmental Characteristics

Items	Descriptions	
Tensile	short-term	600N
	long-term	300N
Crush	short-term	1000 N/10cm
	long-term	200 N/10cm
Min.Bend Radius (Dynamic)	mm	20D
Min.Bend Radius (Static)	mm	10D
Operating Temperature	- 2 0 C+ 6 0 C	
Temperature Range	-2 0 C+ 6 0 C	

Corning G657A1 Optical Specifications

Maximum Attenuation

Wavelength (nm)	Maximum Value* (dB/km)
1310	≤ 0.32
1383**	≤ 0.32
1490	≤ 0.21
1550	≤ 0.18
1625	≤ 0.20

*Alternate attenuation offerings available upon request.

**Attenuation values at this wavelength represent post-hydrogen aging performance.

Attenuation vs. Wavelength

Range (nm)	Ref. λ (nm)	Max. α Difference (dB/km)
1285 – 1330	1310	0.03
1525 – 1575	1550	0.02

The attenuation in a given wavelength range does not exceed the attenuation of the reference wavelength (λ) by more than the value α .

Macrobend Loss

Mandrel Radius (mm)	Number of Turns	Wavelength (nm)	Induced Attenuation* (dB)
10	1	1550	≤ 0.50
10	1	1625	≤ 1.5
15	10	1550	≤ 0.05
15	10	1625	≤ 0.30
30	100	1625	≤ 0.1

*The induced attenuation due to fiber wrapped around a mandrel of a specified radius.

Point Discontinuity

Wavelength (nm)	Point Discontinuity (dB)
1310	≤ 0.05
1550	≤ 0.05

Cable Cutoff Wavelength (λ_{cc})

$\lambda_{cc} \leq 1260$ nm

Mode Field Diameter

Wavelength (nm)	Mode Field Diameter (μ m)
1310	9.2 ± 0.4
1550	10.4 ± 0.5

Dispersion

Wavelength (nm)	Dispersion Value [ps/(nm·km)]
1550	≤ 18
1625	≤ 22

Zero Dispersion Wavelength (λ_0): 1304 nm ≤ λ_0 ≤ 1324 nm

Zero Dispersion Slope (S_0): ≤ 0.092 ps/(nm²·km)

Polarization Mode Dispersion (PMD)

	Value (ps/√km)
PMD Link Design Value	≤ 0.04*
Maximum Individual Fiber PMD	≤ 0.1

*Complies with ITU-T G.650-2 Appendix IV, (m = 20, Q = 0.01%), August 2015.

Dimensional Specifications

Glass Geometry

Fiber Curl	≥ 4.0 m radius of curvature
Cladding Diameter	125.0 ± 0.7 μm
Core-Clad Concentricity	≤ 0.5 μm
Cladding Non-Circularity	≤ 0.7%

Coating Geometry

Coating Diameter	242 ± 5 μm
Coating-Cladding Concentricity	< 12 μm

Environmental Specifications

Environmental Test	Test Condition	Induced Attenuation 1310 nm, 1550 nm, and 1625 nm (dB/km)
Temperature Dependence	-60°C to +85°C*	≤ 0.05
Temperature Humidity Cycling	-10°C to +85°C up to 98% RH	≤ 0.05
Water Immersion	23°C ± 2°C	≤ 0.05
Heat Aging	85°C ± 2°C	≤ 0.05
Damp Heat	85°C at 85% RH	≤ 0.05

Operating Temperature Range: -60°C to +85°C

*Reference temperature = +23°C

Mechanical Specifications

Proof Test

The entire fiber length is subjected to a tensile stress ≥ 100 kpsi (0.69 GPa). Higher proof test levels are available.

Length

Fiber lengths available up to 50.4 km/spool.

Performance Characterizations

Characterized parameters are typical values.

Core Diameter	8.2 μm
Numerical Aperture	0.14 NA is measured at the one percent power level of a one-dimensional far-field scan at 1310 nm.
Effective Group Index of Refraction (n_{eff})	1310 nm: 1.4676 1550 nm: 1.4682
Fatigue Resistance Parameter (n_f)	20
Coating Strip Force	Dry: 0.6 lbs. (3 N) Wet, 14-day room temperature: 0.6 lbs. (3 N)
Rayleigh Backscatter Coefficient (for 1 ns Pulse Width)	1310 nm: -77 dB 1550 nm: -82 dB



Shenzhen UnitekFiber Solution Limited
