


Bundle Fiber Optic Patch Cord LC/PC-LC/PC 72 Cores MM OM3 LSZH 2.0mm

LC-LC Fiber Optic Patch Cord


LC-LC Fiber Optic Patch Cord means that the terminations are connect at both ends of the optical cable to realize the optical path active connection. Optical Fiber Patch Cord is similar to coaxial cable except that there is no mesh shield. The light-transmitting glass core is in the central. The fiber core has a diameter of $50/125\mu\text{m}$ to $65/125\mu\text{m}$ for multi mode fiber patch cords, which is roughly equivalent to the thickness of a human hair. The diameter for single mode fiber core is $8\mu\text{m}$ to $10\mu\text{m}$. The fiber core is wrapped by a glass which is having a lower index of refraction than the core to maintain the fiber within the core

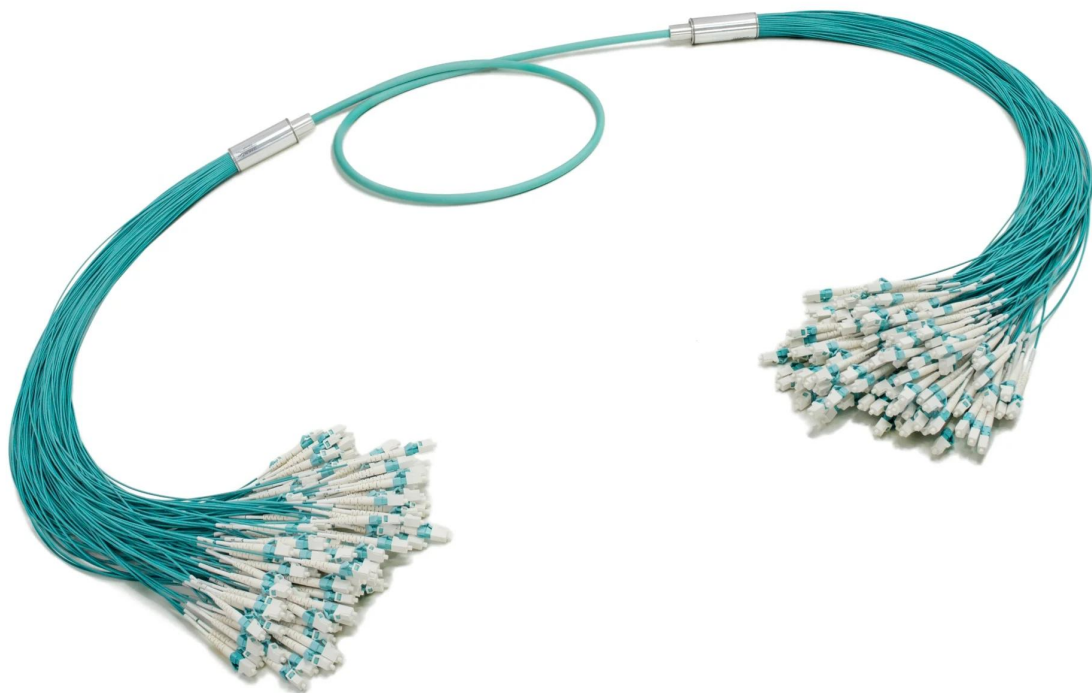

Connector Technical Parameter

Model		MM
Connector A : LC		
Insertion Loss	Standard	≤0.3dB
Return Loss		PC≥35dB
Durability(500 Matings)		≤0.2dB
Test Wavelength		850nm&1300nm
Connector B : LC		
Insertion Loss	Standard	≤0.3dB
Return Loss		PC≥35dB
Durability(500 Matings)		≤0.2dB
Test Wavelength		850nm&1300nm

Cable Structure Diagram

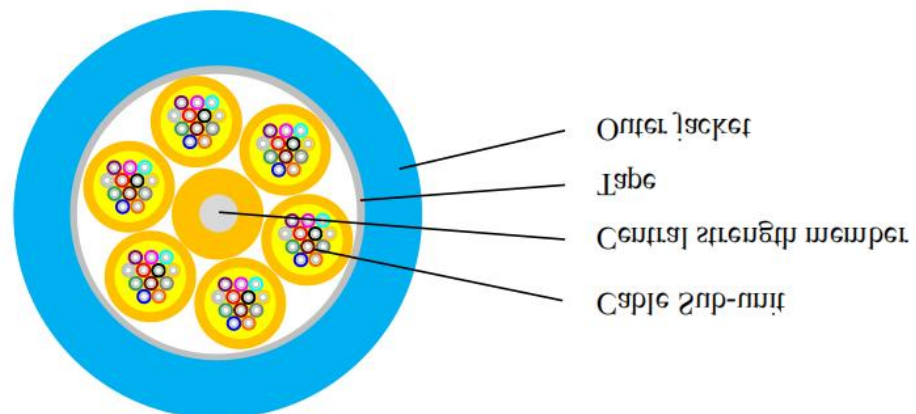

Cable Dimensions and Constructions

Items		Descriptions
Tight-buffered Fiber	Dimension	850±50μm
	Fiber Count	72
	Material	PVC
	Color	Blue、 Orange、 Green、 Brown、 Gray、 White
Strength Member	Material	Aramid Yarn
Cable Subunit	Dimension	5.5±0.2m
	Material	LSZH
	Color	Yellow
	Strength Member	Aramid Yarn
	Printing Marks	1# ~ 6 #
Central Strength Member	FRP + LSZH	
Sheath	Material	LSZH-UV
	Color	Orange
	Diameter	20.5±0.5mm

Mechanical and Environmental Characteristics

Items	Descriptions	
Tensile	short-term	1500N
	long-term	800N
Crush	short-term	1000 N/10cm
	long-term	300 N/10cm
Min.Bend Radius (Dynamic)	mm	20D
Min.Bend Radius (Static)	mm	10D
Operating Temperature	- 2 0 C+ 6 0 C	
Temperature Range	-2 0 C+ 6 0 C	

Fiber Attenuation

OM3-150 50/125μm Technical data

OM3-150 50/125μm Technical data			
Characteristic	Condition	Data	Unit
Optical properties			
Attenuation	850nm 1300nm	≤2.5 ≤0.7	dB/km dB/km
Bandwidth	850nm 1300nm	≥700 ≥500	MHz.km MHz.km
Effective bandwidth	850nm	≥950	MHz.km
10Gb / s Ethernet link length		150	m
Numerical aperture (NA)		0.185~0.215	
The differential modulus delay DMD		850nm DMD Inner template (ps/m) (radius 5~18μm) ≤0.7	850nm DMD Inner template (ps/m) (radius 0~23μm) ≤0.7
Backscatter characteristics (1300nm)			
Partly discontinuous point		≤0.1	dB
Fiber attenuation inhomogeneity		≤0.1	dB
Bidirectional backscattering coefficient difference		≤0.1	dB/km
Geometric characteristics			
Core diameter		50±2.5	μm
Cladding roundness		≤6.0	%
Coating diameter		125±2	μm
Cladding roundness		≤2.0	%
Coating / cladding concentricity error		≤1.5	μm
Coating diameter		245±10	μm
Core / package concentricity error		≤12.0	μm
Delivery length		1.1~8.8	km/reel
Environmental characteristics (850nm And 1300nm)			
Temperature additional attenuation	-60°C ~+85°C	≤0.15	dB/km
Flooding additional attenuation	-10°C ~+85°C, 98%Relative	≤0.20	dB/km
Hot and humid additional attenuation	23°C±2°C	≤0.20	dB/km
Dry heat aging	85°C±2°C和 85% Relative	≤0.20	dB/km

Mechanical properties	85°C±2°C	≤0.20	dB/km
Screening tension			
The macro bend Additional attenuation 100 laps Φ75mm		≥9.0	N
Coating peeling force	850nm&1300nm	≤0.5	dB
Dynamic fatigue parameters	Typical average	1.5	N
Dry heat aging		≥20	