




Fiber Optic Patch Cord|SC-LC Fiber Jumper Singlemode


OS2 9/125 μ m DX \leq 3.0dB PVC-OFNP Yellow

Fiber Cable

Unitek Fiber provide patch cord. Patch cord means that the terminations are connect at both ends of the optical cable to realize the optical path active connection. Optical Fiber Patch cord is similar to coaxial cable except that there is no mesh shield. The light-transmitting glass core is in the central. The fiber core has a diameter of 9/125um 50/125 μ m and 65/125 μ m for SM and multi mode fiber path cord, which is roughly equivalent to the thickness of a human hair. The diameter for single mode fiber core is 8 μ m to 10 μ m. The fiber core is wrapped by a glass which is having a lower index of refraction than the core to maintain the fiber within the core.

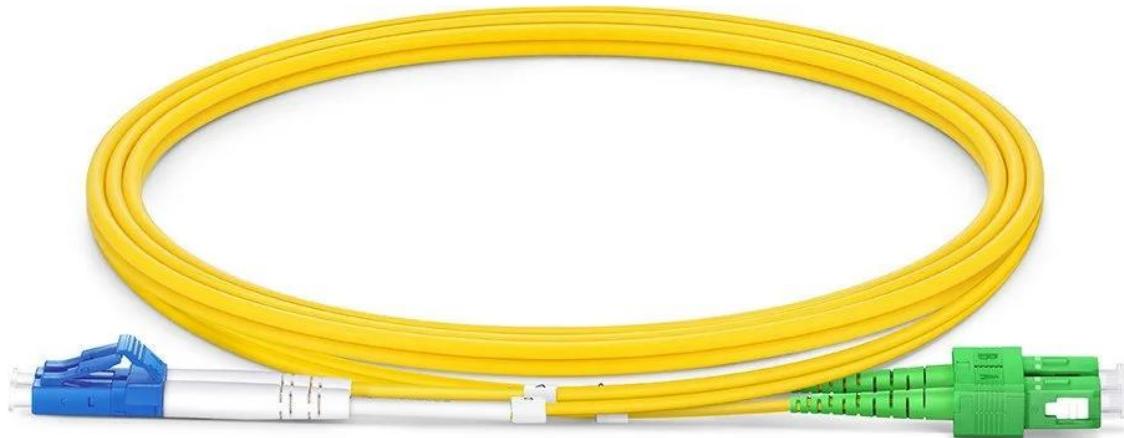

Drawings:

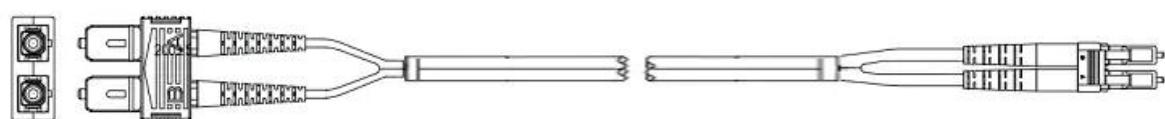

Model		SM
Connector A : SC		
Insertion Loss	Standard	≤0.3dB
Return Loss		APC≥60dB UPC≥50dB
Durability(500 Matings)		≤0.2dB
Test Wavelength		1310nm& 1550nm
Connector B:LC		
Insertion Loss	Standard	≤0.3dB
Return Loss		APC≥60dB UPC≥50dB
Durability(500 Matings)		≤0.2dB
Test Wavelength		1310nm& 1550nm

Cable Structure Diagram

Cable Dimensions and Constructions

Items	Descriptions	
Optical Fiber	Fiber count	2
	Color	Optical Fiber Chromatography
	Diameter	850±50μm
Strength Member	Material	Aramid yarn
Sheath	Material	PVC-OFNP
	Color	Yellow
	Diameter	2.0±0.10mm

Mechanical and Environmental Characteristics

Items	Descriptions	
Crush Resistance	short-term	1000N/100mm
	long-term	200N/100mm
Min.Bend Radius (Dynamic)	mm	50
Min.Bend Radius (Static)	mm	30
Operating Temperature	- 20 C + 60 C	
Temperature Range	- 20 C + 60 C	

Fiber Attenuation

The properties of single mode optical fiber (ITU-T Rec. G.657A2)

Characteristic	condition	data	unit
Optical properties			
Attenuation	1310nm 1383nm 1490nm 1550nm 1625nm	≤0.35 ≤0.35 ≤0.23 ≤0.22 ≤0.23	dB/km dB/km dB/km dB/km dB/km
Relative wavelength attenuation @1310nm @1550nm	1285~1330nm 1525~1575nm	≤0.05 ≤0.05	dB/km dB/km
Dispersion in the wavelength range of	1285~1340nm 1550nm	≤3.5 ≤18	ps/(nm.km) ps/(nm.km)
Zero dispersion wavelength		1300~1324	nm
A zero-dispersion slope		≤0.092	ps/(nm ² .km)
Polarization Mode Dispersion Coefficient PMD Single fiber maximum Fiber link value (M=20, Q=0.01%) Typical value		≤0.2 ≤0.1 0.04	ps/ ps/ ps/
Cable cut-off wavelength (λ_{cc})		≤1260	nm
Mode field diameter (MFD)	1310nm 1550nm	8.8±0.4 9.8±0.5	μm μm
Attenuation discontinuities	1310nm 1550nm	≤0.05 ≤0.05	dB dB
Geometric characteristics			
Core diameter		125±0.7	μm
Cladding roundness		≤0.7	%



Shenzhen UnitekFiber Solution Limited

Coating diameter		245±5	μm
Coating / package concentricity error		≤12.0	μm
Core / package concentricity error		≤0.5	μm
The warpage (radius)		≥4	m

Environmental characteristics (1310nm、1550nm、1625nm)

Temperature additional attenuation	-60°C ~ +85°C	≤0.05	dB/km
Temperature-humidity cycle additional attenuation	-10°C ~ +85°C, 98% Relative humidity	≤0.05	dB/km
Flooding additional attenuation	23°C, 30 days	≤0.05	dB/km
Hot and humid additional attenuation	85°C and 85% Relative humidity, 30 days	≤0.05	dB/km
Dry heat aging	85°C	≤0.05	dB/km

Mechanical properties

Screening tension		≥9.0	N
The macro bend Additional attenuation 10 CircleΦ30mm 10 CircleΦ30mm 1 CircleΦ20mm 1 CircleΦ20mm 1 CircleΦ15mm 1 CircleΦ15mm	1550nm 1625nm 1550nm 1625nm 1550nm 1625nm	≤0.03 ≤0.1 ≤0.1 ≤0.2 ≤0.5 ≤1.0	dB dB dB dB dB dB
Coating peeling force	Typical average	1.5	N
Dynamic fatigue parameters		≥20	