


FTTH Outdoor Fiber Optical Drop Cable GJXFH SM 2x5mm G657A1 G657A2 2 4 6 Core LSZH Black Jacket

Cable Design

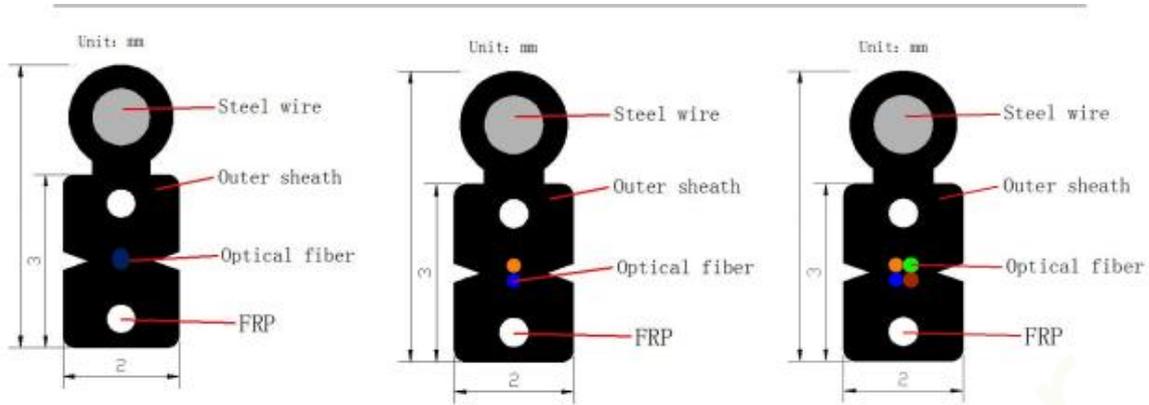

Technical data

No. of cable		1/2/4/6	
Fiber Model		G.657A1/G.657A2	
Steel wire	Diameter (±0.03) mm	0.45	
	NO.	2	
Steel wire	Diameter (±0.03) mm	0.9	
Outer Sheath	Material	LSZH	
	Color	Black	
Cable size (±0.2) mm		2×5	
Cable Weight (±2) kg/km		19	
Allowable Tensile Strength	Short Term	N	600
	Long Term		300
Allowable Crush Resistance	Short Term	N/100mm	2200
	Long Term		1000
Min. bending radius	Without Tension		10× Cable- φ
	Under Maximum Tension		20× Cable- φ
Temperature range (°C)	Installation		-20~+60
	Transport&Storage		-40~+70
	Operation		-40~+70

Fiber Colors

No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	Gray	White

The properties of single mode optical fiber (ITU-T Rec. G.657A1)

Characteristic	condition	data	unit
Optical properties			

Attenuation	1310nm	≤0.35	dB/km
	1383nm(氢老化后)	≤0.35	dB/km
	1490nm	≤0.23	dB/km
	1550nm	≤0.22	dB/km
	1625nm	≤0.23	dB/km
Relative wavelength attenuation @1310nm @1550nm	1285~1330nm	≤0.05	dB/km
	1525~1575nm	≤0.05	dB/km
Dispersion in the wavelength range of	1285~1340nm	≤3.5	ps/(nm.km)
	1550nm	≤18	ps/(nm.km)
Zero dispersion wavelength		1300~1324	nm
A zero-dispersion slope		≤0.092	ps/(nm ² .km)
Polarization Mode Dispersion Coefficient PMD Single fiber maximum Fiber link value (M=20, Q=0.01%) Typical value		≤0.2	ps/
		≤0.1	ps/
		0.04	
			ps/
Cable cut-off wavelength (λ _{cc})		≤1260	nm
Mode field diameter (MFD)	1310nm	8.8±0.4	μm
	1550nm	9.8±0.5	μm
Attenuation discontinuities	1310nm	≤0.05	dB
	1550nm	≤0.05	dB
Geometric characteristics			
Core diameter		125±0.7	μm
Cladding roundness		≤0.7	%
Coating diameter		245±5	μm
Coating / package concentricity error		≤12.0	μm
Core / package concentricity error		≤0.5	μm
The warpage (radius)		≥4	m
Environmental characteristics (1310nm、1550nm、1625nm)			
Temperature additional attenuation	-60℃ ~+85℃	≤0.05	dB/km
Temperature-humidity cycle additional attenuation	-10℃ ~+85℃, 98% Relative humidity	≤0.05	dB/km
Flooding additional attenuation	23℃, 30 days	≤0.05	dB/km
Hot and humid additional attenuation	85℃和 85% Relative humidity, 30 days	≤0.05	dB/km
Dry heat aging	85℃	≤0.05	dB/km
Mechanical properties			
Screening tension		≥9.0	N
The macro bend Additional attenuation	10 CircleΦ30mm		
	10 CircleΦ30mm	1550nm	≤0.025
	1 CircleΦ20mm	1625nm	≤1.0
	1 CircleΦ20mm	1550nm	≤0.75
	1 CircleΦ20mm	1625nm	≤1.5

Coating peeling force	Typical average	1.5	N
Dynamic fatigue parameters		≥20	

Main mechanical & environmental performance test

Item	Test Method	Acceptance Condition
Tensile Strength IEC 794-1-2-E1	- Load: Short term tension - Length of cable: about 50m	- Fiber strain ≤ 0.36% - Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
Crush Test IEC 60794-1-2-E3	- Load: Short term crush - Load time: 1min	- Loss change ≤ 0.05dB@1550nm - No fiber break and no sheath damage.
Impact Test IEC 60794-1-2-E4	- Points of impact: 3 - Times of per point: 1 - Impact energy: 5J	- Loss change ≤ 0.1dB@1550nm - No fiber break and no sheath damage.
Temperature Cycling Test YD/T901-2001-4.4.4.1	- Temperature step: +20°C→-40°C→+70°C →+20°C - Time per each step: 12 hrs - Number of cycle: 2	- Loss change ≤ 0.05 dB/km@1550 nm - No fiber break and no sheath damage.

The properties of single mode optical fiber (ITU-T Rec. G.657A2)

Characteristic	condition	data	unit
Optical properties			
Attenuation	1310nm 1383nm(氢老化后) 1490nm 1550nm 1625nm	≤0.35 ≤0.35 ≤0.23 ≤0.22 ≤0.23	dB/km dB/km dB/km dB/km dB/km
Relative wavelength attenuation @1310nm @1550nm	1285~1330nm 1525~1575nm	≤0.05 ≤0.05	dB/km dB/km
Dispersion in the wavelength range of	1285~1340nm 1550nm	≤3.5 ≤18	ps/(nm.km) ps/(nm.km)
Zero dispersion wavelength		1300~1324	nm
A zero-dispersion slope		≤0.092	ps/(nm ² .km)
Polarization Mode Dispersion Coefficient PMD Single fiber maximum Fiber link value (M=20, Q=0.01%) Typical value		≤0.2 ≤0.1 0.04	ps/ ps/ ps/
Cable cut-off wavelength (λ _{cc})		≤1260	nm
Mode field diameter (MFD)	1310nm 1550nm	8.8±0.4 9.8±0.5	μm μm
Attenuation discontinuities	1310nm 1550nm	≤0.05 ≤0.05	dB dB
Geometric characteristics			
Core diameter		125±0.7	μm
Cladding roundness		≤0.7	%

Coating diameter		245±5	μm
Coating / package concentricity error		≤12.0	μm
Core / package concentricity error		≤0.5	μm
The warpage (radius)		≥4	m
Environmental characteristics (1310nm、1550nm、1625nm)			
Temperature additional attenuation	-60℃ ~+85℃	≤0.05	dB/km
Temperature-humidity cycle additional attenuation	-10℃ ~+85℃, 98% Relative humidity	≤0.05	dB/km
Flooding additional attenuation	23℃, 30 days	≤0.05	dB/km
Hot and humid additional attenuation	85℃和 85% Relative humidity, 30 days	≤0.05	dB/km
Dry heat aging	85℃	≤0.05	dB/km
Mechanical properties			
Screening tension		≥9.0	N
The macro bend Additional attenuation			
10 CircleΦ30mm	1550nm	≤0.03	dB
10 CircleΦ30mm	1625nm	≤0.1	dB
1 CircleΦ20mm	1550nm	≤0.1	dB
1 CircleΦ20mm	1625nm	≤0.2	dB
1 CircleΦ15mm	1550nm	≤0.5	dB
1 CircleΦ15mm	1625nm	≤1.0	dB
Coating peeling force	Typical average	1.5	N
Dynamic fatigue parameters		≥20	

Sheath marking

The optical fiber drop cable shall have sequentially numbered length marking at intervals of approximately 1 meter. The starting number of ordering length for any coil shall begin with zero meter. The accuracy of the measurement of length marking shall be held within the limits of ±1%.

- a) Type of wire
- b) Year and month of manufacture
- c) Length marking each meter along the wire